

## SUBMITTAL DATA - INDOOR UNIT VEHW007N4T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

### **FEATURES**

- Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- · Anti-Freezing Protection

3

## **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS			
PERFORMANCE			
Cooling Capacity* (Btu/h)		7,506	Air inlet
Heating Capacity* (Btu/h)		8,530	2 / \
Airflow (CFM)	High	294	
	Medium	247	
	Low	206	
Sound Pressure Level (dBA)	H/M/L	38/34/30	
ELECTRICAL DATA			4 /
Power Supply (V / Hz / Ph)	220-2	40 / 50 / 1	Air outlet
MOP (A)		6	
Rated Current (A)	Cooling	0.2	
	Heating	0.2	
			1. Surface Panel
DIMENSIONS			2. Air Filters
Unit Dimensions (in)	Height	10 3/4	3. Electronic Box
	Width	33 1/8	4. Swing Louvers
	Depth	7	5. Drain Hose
Liquid Pipe Connection (in)		1/4	
Gas Pipe Connection (in)		3/8	
Shipping Weight (lb)		27.5	
Net Weight (lb)		22	

## NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW007N4T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

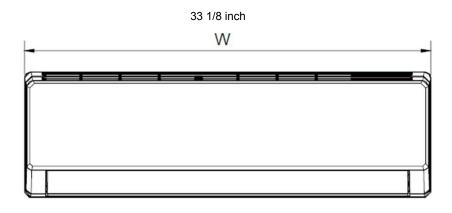







## SUBMITTAL DATA - INDOOR UNIT VEHW009N4T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

### **FEATURES**


- Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- · Anti-Freezing Protection

### **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS		
PERFORMANCE Cooling Capacity* (Btu/h) Heating Capacity* (Btu/h) Airflow (CFM)	High Medium Low	247
Sound Pressure Level (dBA)	H/M/L	38/34/30
ELECTRICAL DATA  Power Supply (V / Hz / Ph)  MOP (A)  Rated Current (A)	220-2 Cooling Heating	40 / 50 / 1 6 0.2 0.2
<b>DIMENSIONS</b> Unit Dimensions (in)	Height Width Depth	10 3/4 33 1/8 7
Liquid Pipe Connection (in) Gas Pipe Connection (in) Shipping Weight (lb) Net Weight (lb)		1/4 3/8 27.5 22

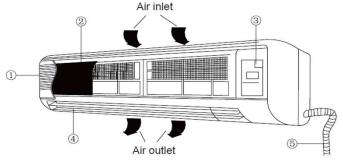

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

NOTES:

\*Cooling and Heating Capacity data is rated at the following

conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW009N4T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

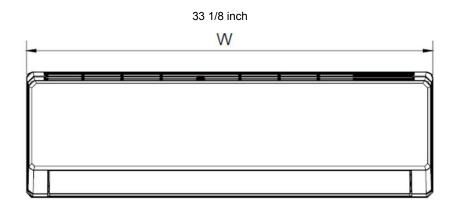



10 3/4 inch





## SUBMITTAL DATA - INDOOR UNIT VEHW012N4T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

### **FEATURES**

- Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- · Anti-Freezing Protection

3

## **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS PERFORMANCE Cooling Capacity* (Btu/h) Heating Capacity* (Btu/h) Airflow (CFM)	High Medium Low	12,283 13,648 371 324 282	Air inlet
Sound Pressure Level (dBA)  ELECTRICAL DATA	H/M/L	44/41/38	
Power Supply (V / Hz / Ph)	220-2	40 / 50 / 1	Air outlet
MOP (A)		6	
Rated Current (A)	Cooling Heating	0.21 0.21	
DIMENSIONS			Surface Panel     Air Filters
Unit Dimensions (in)	Height Width Depth	11 3/4 37 7 3/4	3. Electronic Box Cover 4. Swing Louvers 5. Drain Hose
Liquid Pipe Connection (in)		1/4	
Gas Pipe Connection (in)		1/2	
Shipping Weight (lb) Net Weight (lb)		33 27.5	

## NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW012N4T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

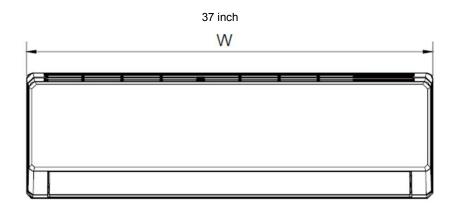







## SUBMITTAL DATA - INDOOR UNIT VEHW015N4T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

### **FEATURES**

- Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- · Anti-Freezing Protection

## **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS PERFORMANCE			
Cooling Capacity* (Btu/h)		15,354	Air inlet
Heating Capacity* (Btu/h)		17,060	② /
Airflow (CFM)	High	371	
, ,	Medium	324	
	Low	282	
Sound Pressure Level (dBA)	H/M/L	44/41/38	
ELECTRICAL DATA			Air outlet
Power Supply (V / Hz / Ph)	220-2	40 / 50 / 1	Air outlet
MOP (A)		6	
Rated Current (A)	Cooling	0.21	
	Heating	0.21	
DIMENSIONS			1. Surface Panel 2. Air Filters
Unit Dimensions (in)	Height	11 3/4	3. Electronic Box Cover
	Width	37	4. Swing Louvers
	Depth	7 3/4	5. Drain Hose
Liquid Pipe Connection (in)		1/4	
Gas Pipe Connection (in)		1/2	
Shipping Weight (lb)		33	
Net Weight (lb)		27.5	

## NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW015N4T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

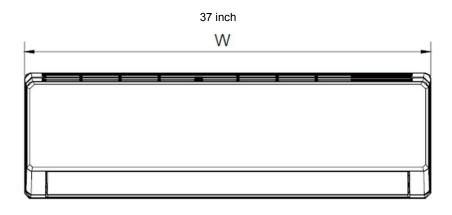







## SUBMITTAL DATA - INDOOR UNIT VEHW017N4T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

### **FEATURES**


- Auto Addressing installation
- Auto Restart
- · Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- · Anti-Freezing Protection

## **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS			
PERFORMANCE			
Cooling Capacity* (Btu/h)		17,060	
Heating Capacity* (Btu/h)		19,790	
Airflow (CFM)	High	371	
	Medium	324	
	Low	282	(1
Sound Pressure Level (dBA)	H/M/L	44/41/38	
ELECTRICAL DATA			
Power Supply (V / Hz / Ph)	220-240 / 50 / 1		
MOP (A)	0 "	6	
Rated Current (A)	Cooling	0.21	
	Heating	0.21	
DIMENSIONS			
Unit Dimensions (in)	Height	11 3/4	
,	Width	37	
	Depth	7 3/4	
Liquid Pipe Connection (in)		1/4	
Gas Pipe Connection (in)		1/2	
Shipping Weight (lb)		33	
Net Weight (lb)		27.5	

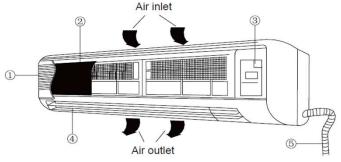

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

NOTES:

\*Cooling and Heating Capacity data is rated at the following

conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW017N4T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

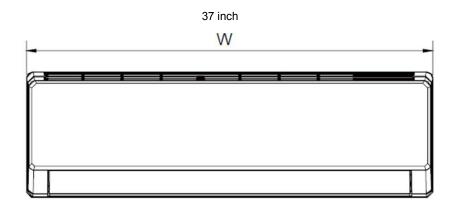







## SUBMITTAL DATA - INDOOR UNIT VEHW019N4T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: Reference Approval Review Construction

### **FEATURES**


- Auto Addressing installation
- Auto Restart
- · Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- Anti-Freezing Protection

## **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS			
PERFORMANCE			
Cooling Capacity* (Btu/h)		19,107	
Heating Capacity* (Btu/h)		21,496	
Airflow (CFM)	High	441	
	Medium	353	
	Low	294	
			C
Sound Pressure Level (dBA)	H/M/L	44/41/38	
ELECTRICAL DATA			
Power Supply (V / Hz / Ph)	220-2	40 / 50 / 1	
MOP (A)		6	
Rated Current (A)	Cooling	0.31	
	Heating	0.31	
DIMENSIONS			
Unit Dimensions (in)	Height	12 1/2	
, ,	Width	39 3/4	
	Depth	8 3/4	
Liquid Pipe Connection (in)		3/8	
Gas Pipe Connection (in)		5/8	
Shipping Weight (lb)		40.8	
Net Weight (lb)		33	

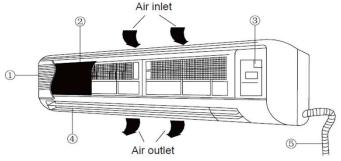

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




## SUBMITTAL DATA - INDOOR UNIT VEHW019N4T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

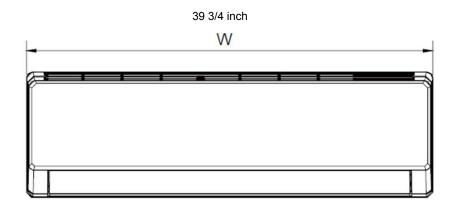







## SUBMITTAL DATA - INDOOR UNIT VEHW021N4T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:	
Location:	Architect:	
Schedule No.:	Date:	
System Designation:	For: Reference Approval Review Construction	

### **FEATURES**


- Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- · Anti-Freezing Protection

## **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS				
PERFORMANCE				
Cooling Capacity* (Btu/h)		21,496		
Heating Capacity* (Btu/h)		23,884		
Airflow (CFM)	High	441		
	Medium	353		
	Low	294		
Sound Pressure Level (dBA)	H/M/L	44/41/38		
ELECTRICAL DATA				
Power Supply (V / Hz / Ph) MOP (A)	220-240 / 50 / 1 6			
Rated Current (A)	Cooling	0.31		
	Heating	0.31		
DIMENSIONS				
Unit Dimensions (in)	Height	12 1/2		
	Width	39 3/4		
	Depth	8 3/4		
Liquid Pipe Connection (in)		3/8		
Gas Pipe Connection (in)		5/8		
Shipping Weight (lb)		40.8		
Net Weight (lb)		33		

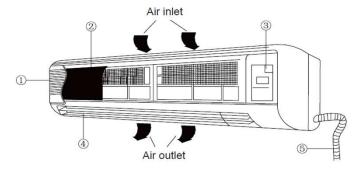

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

NOTES:

\*Cooling and Heating Capacity data is rated at the following conditions:


Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor


Heating: 70 °F DB Indoor, 47 °F DB




# SUBMITTAL DATA - INDOOR UNIT VEHW021N4T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

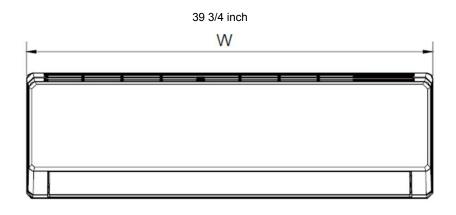







## SUBMITTAL DATA - INDOOR UNIT VEHW024N4T VRF WALL MOUNTED TYPE EVAPORATOR

Job Name:	Engineer:	
Location:	Architect:	
Schedule No.:	Date:	
System Designation:	For: Reference Approval Review Construction	

### **FEATURES**


- Auto Addressing installation
- Auto Restart
- Auto Swing Louvers
- Built-in Electronic Expansion Valve
- LED Display
- Washable Filter

- Mildew-proof Filter
- · Anti-Freezing Protection

## **PRODUCT WARRANTY**

All covered components - one year limited warranty

SPECIFICATIONS			
PERFORMANCE			
Cooling Capacity* (Btu/h)		24,225	
Heating Capacity* (Btu/h)		25,590	
Airflow (CFM)	High	441	
	Medium	353	
	Low	294	
Sound Pressure Level (dBA)	H/M/L	44/41/38	
ELECTRICAL DATA			
Power Supply (V / Hz / Ph)	220-240 / 50 / 1		
MOP (A)		6	
Rated Current (A)	Cooling	0.31	
	Heating	0.31	
DIMENSIONS			
Unit Dimensions (in)	Height	12 1/2	
	Width	39 3/4	
	Depth	8 3/4	
Liquid Pipe Connection (in)		3/8	
Gas Pipe Connection (in)		5/8	
Shipping Weight (lb)		40.8	
Net Weight (lb)		33	

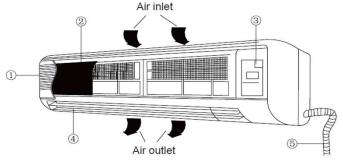

- 1. Surface Panel
- 2. Air Filters
- 3. Electronic Box Cover
- 4. Swing Louvers
- 5. Drain Hose

NOTES:

\*Cooling and Heating Capacity data is rated at the following

conditions:

Cooling: 80 °F DB / 67 °F WB Indoor, 95 °F DB Outdoor

Heating: 70 °F DB Indoor, 47 °F DB



# SUBMITTAL DATA - INDOOR UNIT VEHW024N4T VRF WALL MOUNTED TYPE EVAPORATOR

## **DIMENSIONAL DRAWINGS**

